


YJ Planar Schottky Barrier Diode Die Specification

15V 40A, 230mil, Schottky barrier diode die based on silicon planar process
 Part No.: PSB230L015AS-290A

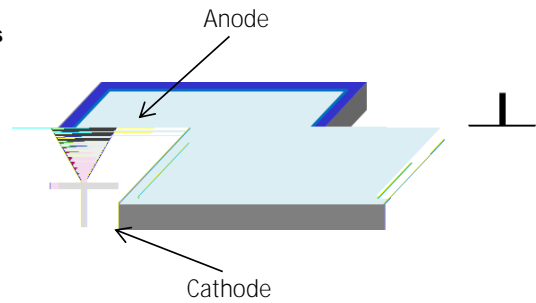

Main Products Characteristics

- Average forward current: $I_{F(AV)} = 40A$
- Maximum operating junction temperature: $T_j = 125\text{ }^\circ\text{C}$
- ESD rating: >8KV, per IEC61000-4-2 (Contact Discharge)
- Top metal: AL


Maximum Ratings

Parameter	Symbol	Rating
Repetitive peak reverse voltage	V_{RRM}	15 V
Average forward current	$I_{F(AV)}$	40A
Non-repetitive peak surge current ($t_p = 8.3\text{ ms}$, halfwave, 1 cycle)	I_{FSM}	120 A
Storage temperature range	T_{stg}	-50 to +125 $^\circ\text{C}$
Maximum operating junction temperature	T_j	125 $^\circ\text{C}$

Static Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	
		Spec	Typical
Reverse breakdown voltage $I_R = 1\text{mA}$	V_{BR}	15V	34V
Maximum forward voltage drop $I_F = 40\text{A}$ Pulse Test: $t_p = 300\text{ }\mu\text{s}$, 2%	V_F	0.5V	0.42V
Maximum reverse current $V_R = 15\text{V}$ Pulse Test: $t_p = 300\text{ }\mu\text{s}$, 2%	I_R	5mA	100uA

Device Schematics and Outline Drawing

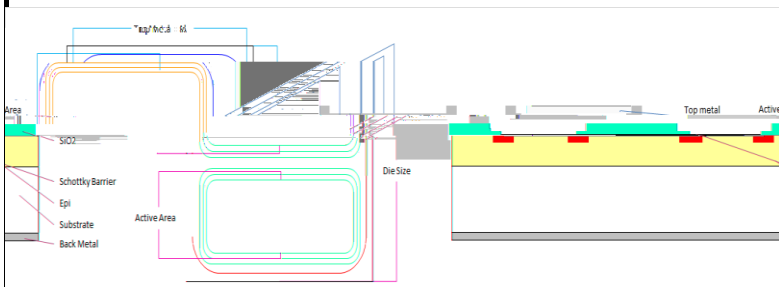

Die Thickness *	11.4 Mils
Die Size **	230 Mils
Top Metal Pad	227*112 Mils
Active Area	218*105 Mils
Top Metal	AL
Back Metal	Ag

Note: 1 * : Also can offer device with 8 mils thickness
 2 **: Cutting street width is around 1.5 mils

Important Notice

<p>Specification apply to die only. Actual performance may degrade when assembled.</p> <p>does not guarantee device performance after assembly. All operating parameters must be validated for each customer application by customer's technical experts.</p> <p>Data sheet information is subjected to change without notice.</p>	<p>Recommended Storage Environment:</p> <p>Store in original container, in dessicated nitrogen, with no contamination.</p> <p>Shelf life for parts stored in above condition is 2 years.</p> <p>If the storage is done in normal atmosphere shelf life is reduced to 6 months.</p>
---	--

0514-80982389
 0514-80980189

Rev.O 2021/07/28