

## FRED Modules

**V<sub>RRM</sub>** 1200V


**I<sub>FAV</sub>** 300 A

### Applications

- y Inversion Welder
- y Uninterruptible Power Supply (UPS)
- y Plating Power Supply
- y Ultrasonic Cleaner and Welder
- y Power Factor Correction (PFC) Circuit
- y Converter & Chopper

### Features

- y Soft Reverse Recovery Characteristics
- y Ultrafast Reverse Recovery Time
- y Low Reverse Recovery Loss
- y Low Forward Voltage
- y High Surge Current Capability
- y Low Inductance Package

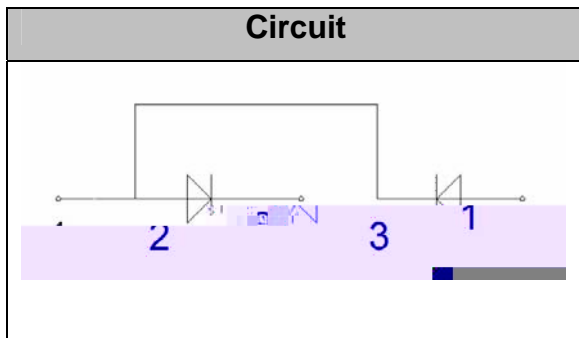

Symbol	Conditions	Values	Units
$V_R$		1200	V
$V_{RRM}$		1200	V
$I_{F(AV)}$	$T_C=110^{\circ}\text{C}$ , Per Diode	300	A
$I_{F(RMS)}$	$T_C=110^{\circ}\text{C}$ , Per Diode	420	A
$I_{FSM}$	1/2 Cycle, 50Hz, Sine	2700	A
	1/2 Cycle, 60Hz, Sine	2850	A
$I^2t$	$T_J=45^{\circ}\text{C}$ , $t=10\text{ms}$ , 50Hz, Sine	36450	$\text{A}^2\text{s}$
	$T_J=45^{\circ}\text{C}$ , $t=8.3\text{ms}$ , 60Hz, Sine	40613	$\text{A}^2\text{s}$
$P_D$		893	W
Visol	AC, $T_{on}=1\text{min}$	3000	V
$T_J$		-40 to +150	$^{\circ}\text{C}$
$T_{STG}$		-40 to +125	$^{\circ}\text{C}$
Torque	Recommended M6	$5\pm 15\%$	N·m
Torque	Recommended M6	$5\pm 15\%$	N·m
Weight		160	g

### Thermal Characteristics

Symbol	Conditions	Values	Units
$R_{th(j-c)}$	Per diode	0.14	/W



### Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
$I_{RM}$	$V_R=1200V$	--	--	1	mA
	$V_R=1200V, T_J=125^\circ C$	--	--	5	mA
$V_F$	$I_F=300A$	--	2.8	3.1	V
	$I_F=300A, T_J=125^\circ C$	--	2.1	2.4	V
$t_{rr}$	$I_F=1A, V_R=30V, di_F/dt=-200A/s$	--	65	--	ns
$t_{rr}$	$V_R=600V, I_F=300A, di_F/dt=-200A/s, T_J=25^\circ C$	--	135	--	ns
$I_{RRM}$		--	10	--	A
$t_{rr}$	$V_R=600V, I_F=300A, di_F/dt=-200A/s, T_J=125^\circ C$	--	385	--	ns
$I_{RRM}$		--	25	--	A

### Performance Curves

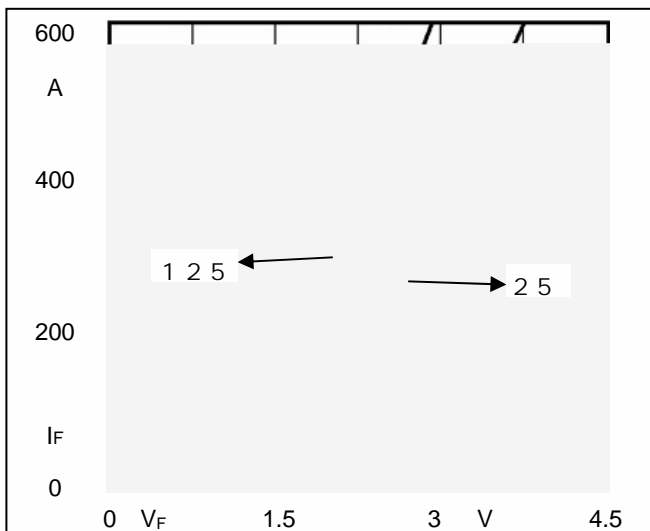


Fig1. Forward Voltage Drop vs Forward Current

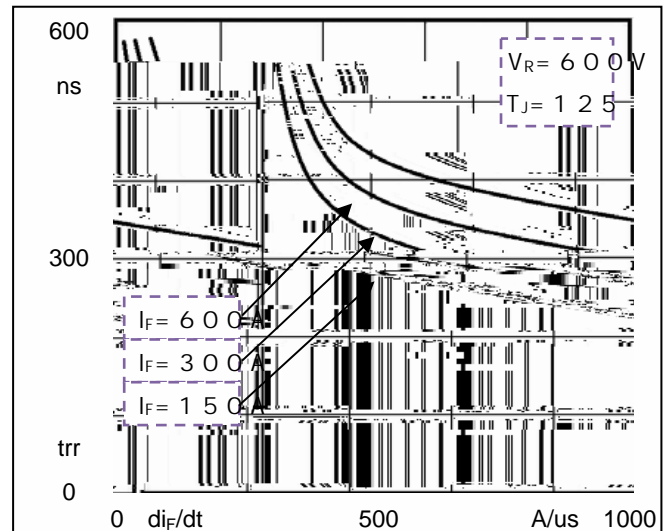


Fig2. Reverse Recovery Time vs  $di_F/dt$

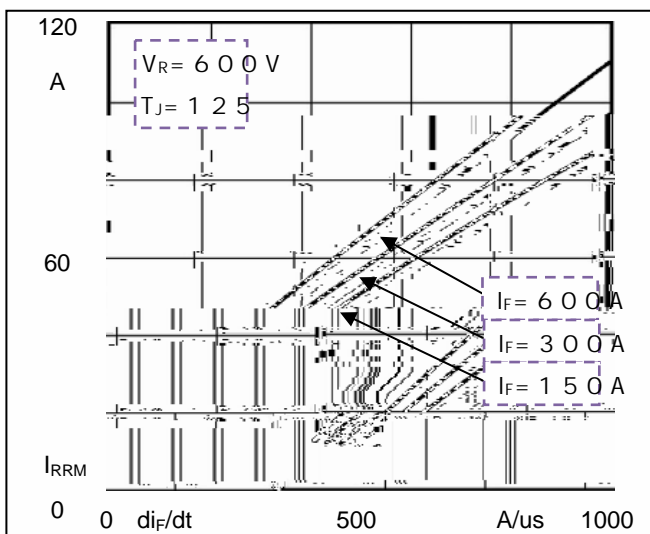


Fig3. Reverse Recovery Current vs  $di_F/dt$


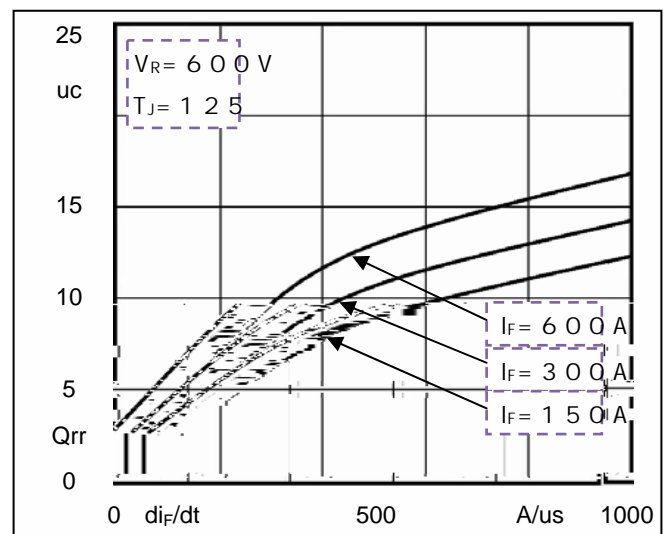


Fig4. Reverse Recovery Charge vs  $di_F/dt$

## Package Outline Information

CASE: F2

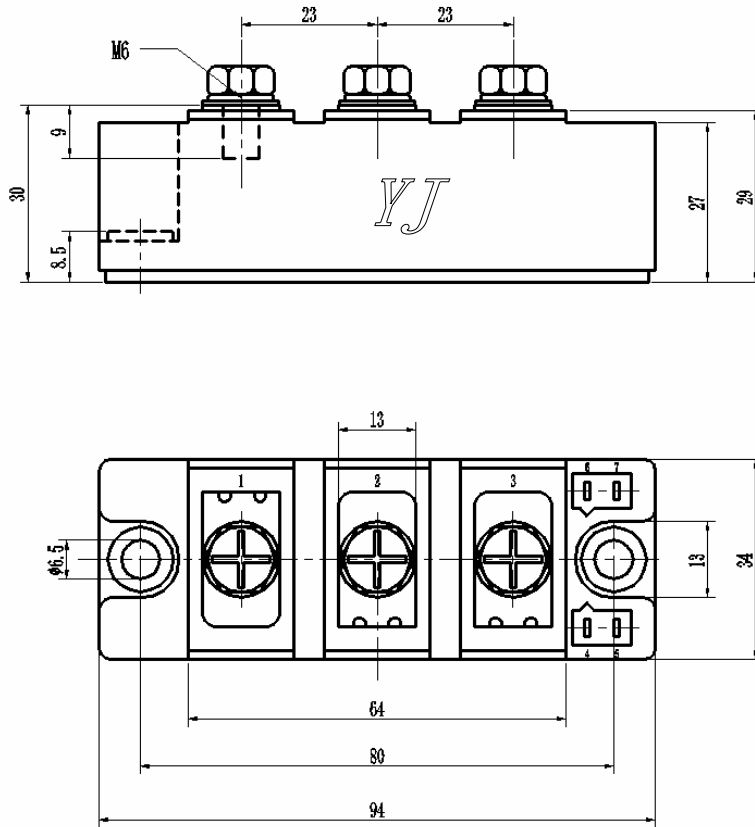

Dimensions in mm