


RoHS

COMPLIANT

313 'LJLWDO 7UDQVLVWRUV %XLOW LQ

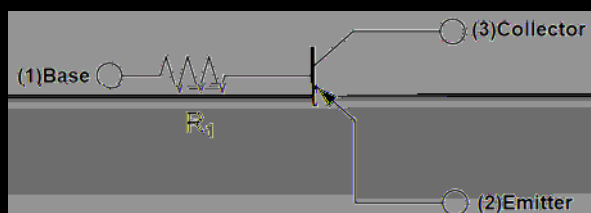

)HDWXUHV

z 0RLVWXUH VHQW³LWLYLW\ OHYHO
z +DORJHQ IUHH DQG 5R+6 FRPSOL
z 6XUIDFH PRXQW SDFNDJH LGHDOO
DXWRPDWL³ LQVHUWLRQ

\$SSOLFDFWLRQ

z 6LJQDO DPSOLILFDWLRQ
z 6ZLWFKLQJ FLUFXLW

z 3DFNDJH 2 70³
z 7HUPLOD³ SODWHG OHDGW³
- 67' DQG -(6' o³⁰%

D[

(PLWWHU EDVH EUHDN	GRZQ5 YROWDJH (	X\$9	,			
&ROOHFWRU EDVH FXW RII&XU	UHQW		,			



0"
' 7 \$ 7 & \$


RoHS
COMPLIANT

0³

v

O^3

v 2XWOLQH 'LPHQVLRQV

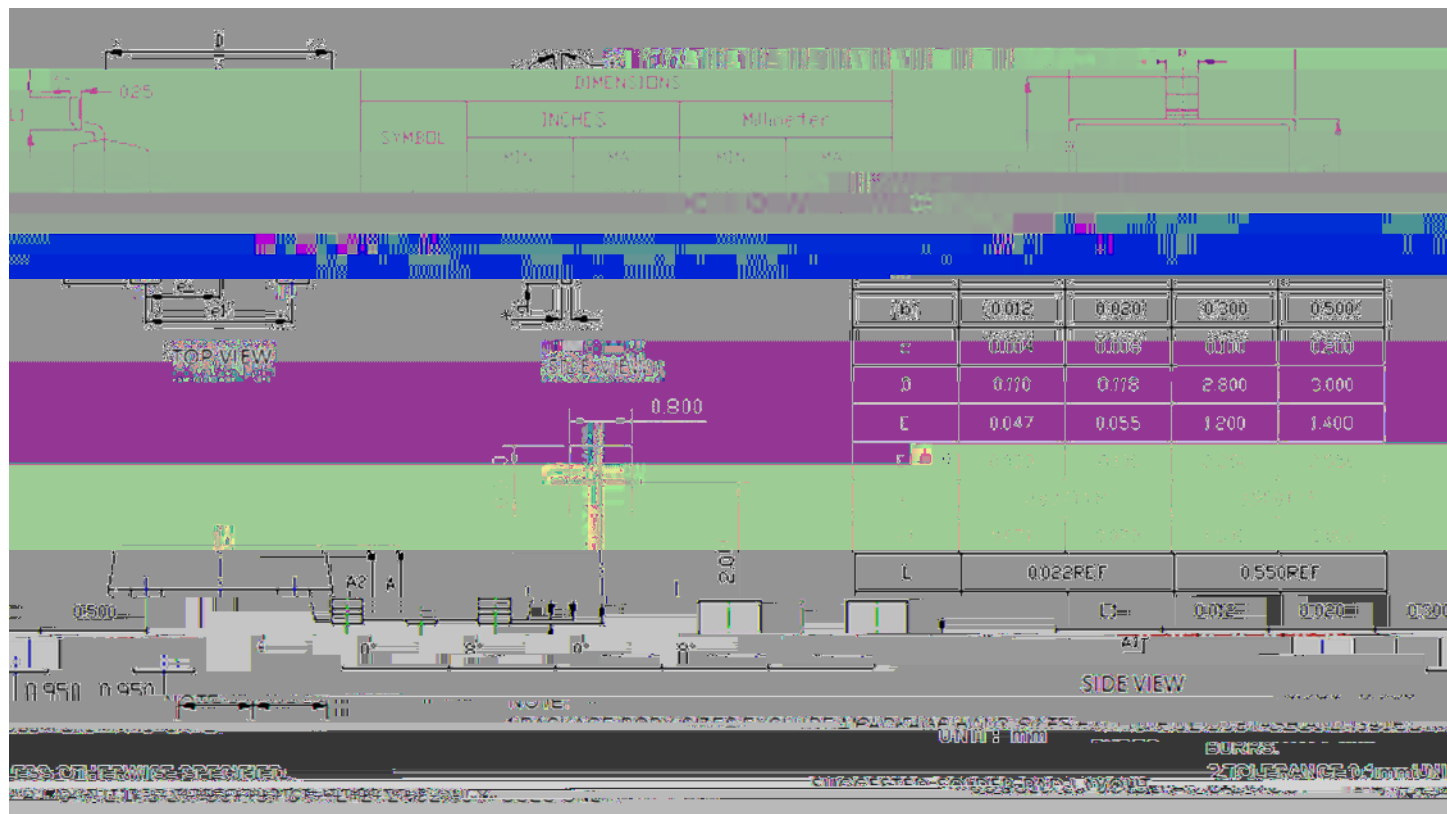

Note:

1. All dimensions are in millimeters (mm), unless otherwise specified.

而西門子則在 2007 年 12 月 1 日宣佈，將以 16 億 5 千萬美元收購

2. General Information: #010

另有说明] [通用公差为±0.10mm, 除另

nach der ASNT Y14.5M-2010 3 Dimensionales und lokales

4.5M-2016-标准

4. All dimensions shown are exclusive of burrs and ante residues. Burrs and ante residues shall not

exceed 0.15 mm in maximum.

※出口裝箱的尺吋最大不得超過0.16公尺

[illegible]

6. The maximum lateral displacement of the cold rebar was 100 mm. The maximum lateral displacement of the cold rebar was 100 mm.

It includes lead flash, protrusions and burrs but exclude the maximum allowable dimensions exclude mold flash

mold mismatch.

〔D和E是密封体的外部极限尺寸，不包括包封材料、内引线材料、凸出部分以及胶体毛刺，但是包含了包封错位的最小尺寸〕

7.7. Formed leads shall be planar with respect to one another within a maximum of 0.076 mm relative to

the seating plane.

「成型的管脚座为同一平面，共面性最大为0.1mm」

U.S. DEPT. OF JUSTICE

「**「人」の「心」を「通」す**」

$$0^3$$
 0^3

6 6 <DOJIKRX <DOJMEH H0K0WORDL&PZZZ/WGDOJMLH F

5HY -DQ

0"
' 7 \$ 7 & \$
