



Bridge Rectifiers

Features



ABSK12S THRU ABSK110S

Thermal Characteristics

PARAMETER		SYMBOL	UNIT	ABSK12S	ABSK14S	ABSK16S	ABSK18S	ABSK110S

Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

Characteristics (Typical)

FIG1:Io-Ta Curve


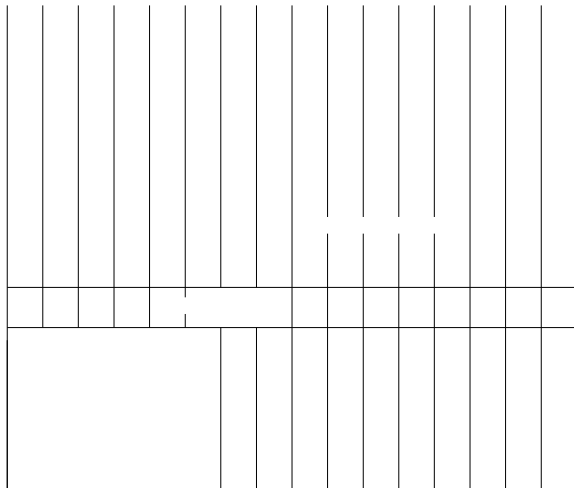


FIG3: Forward Voltage



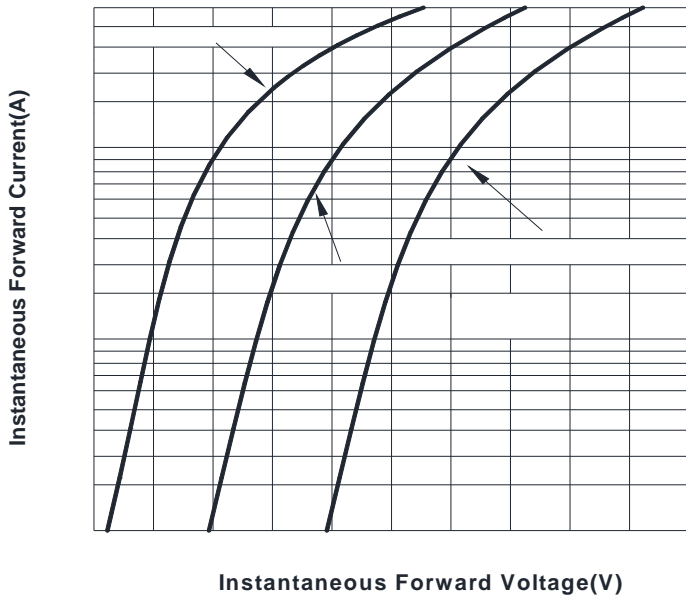

ABSK12S THRU ABSK110S

Disclaimer